


# ABS Series

## 安全煞車 Power Off Brake

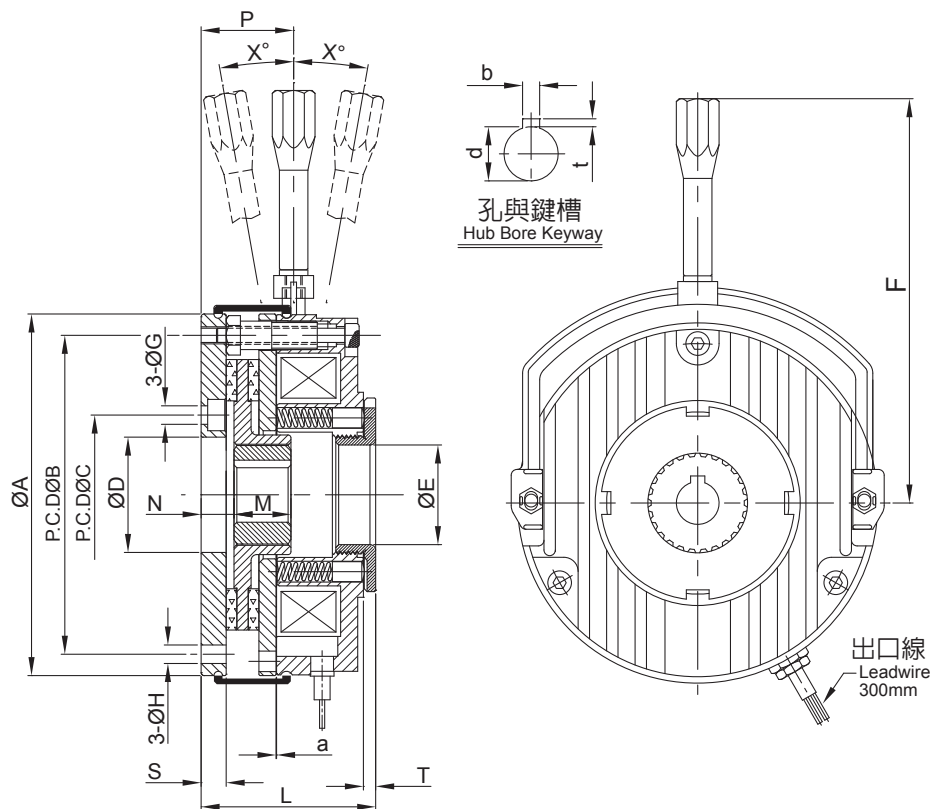

| 型號 MODEL                                    | ABS0S4AA      | ABS0S8AA  | ABS1S6AA | ABS3S2AA | ABS006AA | ABS008AA | ABS015AA | ABS024AA | ABS048AA |       |      |    |
|---|---------------|-----------|----------|----------|----------|----------|----------|----------|----------|-------|------|----|
| 靜摩擦轉距<br>Static Friction Torque [kgm](Nm)   | 0.4 (4.0)     | 0.8 (8.0) | 1.6 (16) | 3.2 (32) | 6.0 (60) | 8.0 (80) | 15 (150) | 24 (240) | 48 (480) |       |      |    |
| 慣性矩 J (kgm <sup>2</sup> ) x10 <sup>-3</sup> | 0.015         | 0.06      | 0.2      | 0.45     | 0.63     | 1.5      | 2.9      | 7.3      | 20       |       |      |    |
| 電壓 Voltage DC-V                             | 24 / 90 / 190 |           |          |          |          |          |          |          |          |       |      |    |
| 功率 Power [24V](W) at 20°C                   | 20            | 25        | 30       | 40       | 50       | 65       | 85       | 110      | 110      |       |      |    |
| 外型尺寸<br>Exterior dimensions                 | A             | 83        | 102      | 127      | 147      | 162      | 188      | 215      | 254      | 301.8 |      |    |
|   | B             | 72        | 90       | 112      | 132      | 145      | 170      | 196      | 230      | 278   |      |    |
|   | C             | 30        | 45       | 56       | 62       | 74       | 84       | 100      | —        | —     |      |    |
|   | D             | 20        | 30       | 40.5     | 45       | 55       | 65       | 75       | 90       | 120.3 |      |    |
|   | E             | 19        | 24       | 35       | 40       | 47.6     | 54.5     | 61.5     | 85       | 115   |      |    |
|   | F             | 99        | 109      | 142      | 153      | 185      | 200      | 260      | 420      | 504   |      |    |
|   | G             | 4.5       | 5.5      | 6.5      |          |          | 9        |          |          | 11    |      |    |
|   | H             |           |          |          |          |          |          |          |          |       |      |    |
|   | L             | 41        | 52       | 57       | 66.6     | 76       | 85.5     | 96       | 108.5    | 119   |      |    |
|   | M             | 17.6      | 20.6     | 20       | 25       |          | 29.8     | 35       | 34       | 50    |      |    |
|   | N             | 7         | 9.5      | 11.5     | 12       | 14       | 14.3     | 15       | 13.8     | 17    |      |    |
|   | P             | 22.5      | 25       | 32.5     | 31       | 38.3     | 41.5     | 46.1     | 62.5     | 70    |      |    |
|   | S             | 5.8       | 7        | 8.8      | 8.7      | 11       |          |          |          |       | 12.5 |    |
|   | T             | 3         | 4.5      |          | 5        |          |          | 6        |          | —     |      |    |
|   | X             | 10°       | 8°       |          |          | 12°      |          |          | 8°       | 20°   |      |    |
| a   | 0.15          |           | 0.2      | 0.25     |          |          | 0.3      | 0.35     | 0.4      |       |      |    |
| d   | 11            | 15        | 20       | 25       |          | 30       | 25       | 30       | 35       | 40    | 35   | 45 |
| b   | 4             | 5         |          |          | 7        |          |          | 10       |          | 12    | 10   | 14 |
| t   | 1.8           | 2.3       |          | 3        |          |          | 3.8      |          | 3.3      | 3.8   | 4    |    |
| 重量 Weight (kg)                              | 1.0           | 1.8       | 3.0      | 4.8      | 7.3      | 12.0     |          | 18.0     | 25.0     | 41.0  |      |    |